



SPA-S1000

IP Audio Server



Key Features

- System Expansion: Up to 512 speakers
- Supported Protocol: IPv4, HTTP, SIP, mDNS, DNS, NTP, TCP, UDP, DHCP, ARP, ICMP
- TTS: English(US, UK), German, French, Spanish, Russian
- Ethernet: 100/1000 Base-T

SPA-S1000

IP Audio Server



Specifications

Product

Type	IP Audio Server
------	-----------------

Network

Ethernet	10/100 Base-T
----------	---------------

General

Operating Temperature	-10 ~ +40°C (+14°F ~ +104°F)
Operating Humidity	10~85% RH (Non-Condensing)
Weight	3.02Kg
Size	482(W)×44(H)×280(D)mm
Color	Black
Certificate	EMC : KS C 9832/9835, EN 55032/55035, FCC Part 15 Subpart B, ICES-003 Safety : KC 62368-1, EN 62368-1, UL 62368-1, CAN/CSA C22.2 No.2 62368-1

Power

PoE	AC 120-240V, 50/60Hz, 10W, DC 24V, 350mA
-----	--

Network Protocol

Security	Password protection : admin,setup,user,guest (sha-2, Digest authentication, User access log) Digest authentication, User access log
Supported Protocols	IPv4, HTTP, SIP, mDNS, DNS, NTP, TCP, UDP, DHCP, ARP, ICMP

System Integration

API (Application Programming Interface)	SUNAPI
Multi-source Dynamic PA control	Multi-source up to 48 (Multicast) (Audio 24CH + Mic 24CH) Up to 512 Zone Control (Multicast) Up to 20 Zone Control (Unicast) Up to 255 Groups
Functional Monitoring	Connection verification, Built-in system logging


SPA-S1000

IP Audio Server



CAD

Unit: mm [inch]

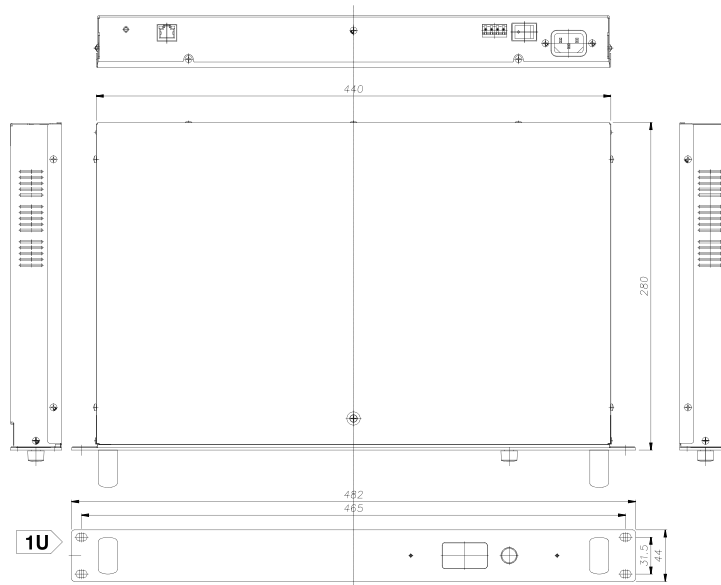

3	MODEL2	
2	MODEL1	
1	SPA-S1000	'22.7.15
No.	MODEL NAME	DATE
Unit: mm[inch] SCALE: 1/1		© Hanwha Techwin

© Hanwha Techwin Co.,Ltd. All rights reserved.