



Audible Signals - Industrial MOTOR DRIVEN SIRENS

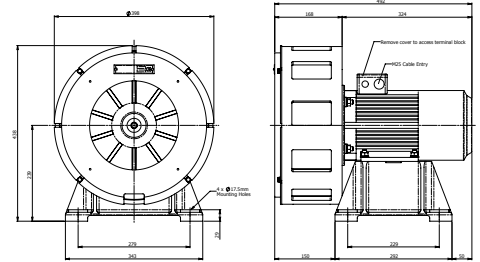

GP6 Siren

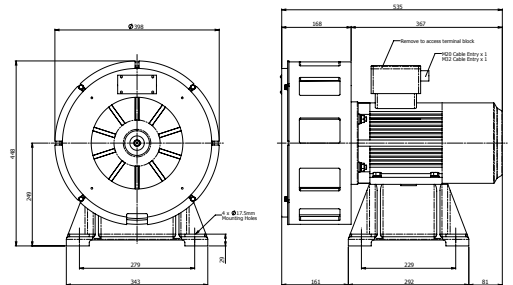

FP6 Siren

FP and GP Sirens > Motor Powered Sirens

Product overview

The FP Range of conventional motor powered sirens provides a basic solution to address wide area mass alert signalling in hazardous area locations for all industrial, civil, commercial and environmental requirements.

The products are of simple rugged construction and provide a low frequency traditional air raid sound.

The GP Range of conventional motor powered sirens provides a basic solution to address wide area mass alert signalling for all industrial, civil, commercial and environmental needs.

Features

- FP Siren: ATEX approved for Zones 1 & 2, Exd IIG IIC T4
- The motor windings are tropicalised as standard
- Roughly omni-directional sound coverage which peaks in the direction of the front stator face
- The siren will only produce a constant tone signal unless additional electrical equipment is added to enable the unit to also produce a wail tone signal.

FP and GP Series > Ordering Information

Siren Type:	Voltage:	Code:	Motor Power:	Current:
FP6	400v Ac ~	AS700MF	3.8kw •	5 A
GP6	400v Ac ~	AS600MF	3.8kw •	5 A

- de-rated to 2.2 kw for 60°C operation

Material

Cast Aluminium and Steel Construction

Kg 50 GP6
66 FP6

~ 50 Hz

°C -20+60

IP 55

dB 135



APPROVALS and
CONFORMITIES



FP version only
is ATEX approved